

Heat shrinkable straight-through joint
for unarmoured polymeric cables

Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE and XLPE (e.g. N(A)YY, NYM, TT). Suitable for compression connectors on aluminium or copper cables.




Product description

Article name	SMH3 1.5-16
Article number	151500
Optional accessory	Compression connectors (see Connecting technology)

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical Data

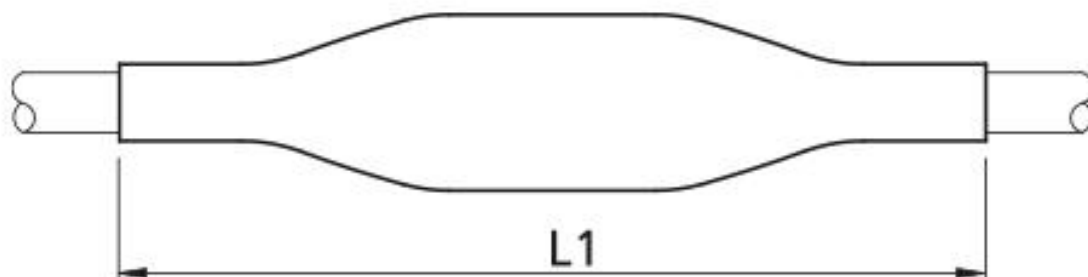

Article name	SMH3 1.5-16
Article number	151500
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	400 mm
Nominal cross section Polymeric cable unarmoured per conductor 3x min	1.5 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 3x max	16 mm ²

Commercial Data

Article name	SMH3 1.5-16
Article number	151500
Delivery scope	Outer sleeve
	Inner sleeves
	Cleaning tissue
	Emery cloth
	Installation instruction
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311057194

Packaging data

Packaging type	Bag1	Case	Pal. OW
Content quantity	1	10	360
Unit of measure	Piece	Piece	Piece
Lenght (mm)	40	430	1200
Width (mm)	70	264	800
Height (mm)	425	160	1130
Net weight (kg)	0.117	1.17	42.12
Gross weight (kg)	0.11	1.105	57.8