




Cable CAT6 4 pairs AWG24 E-Slim U/UTP LSZH Dca, White (305 m box)

GGM C6UHR4WU3

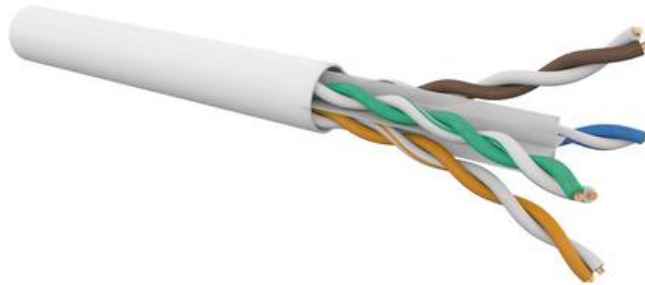

The GIGAMEDIA CAT6 cables are data transmission cables designed for applications requiring a frequency band up to 250 MHz. These cables offer the possibility of exceeding specifications relative to different standards corresponding to the Class E.

- Conductor material : Copper
- Conductor surface : Bare
- AWG size : 24
- Conductor construction : Solid
- Number of conductors : 8
- Pairing : Pairs
- Specification core insulation : PE
- Conductor identification : Colour
- Shield : None
- Shield type : None
- Longitudinal water blocking cable : No
- Radial water blocking cable : No
- Suitable for underground installation : No
- Jacket colour : White
- Cable geometry : Round
- Reaction-to-fire class according to EN 13501-6 : Dca
- Smoke development class according to EN 13501-6 : s2
- Euro class flaming droplets/particles according to EN 13501-6 : d2
- Euro class acidity according to EN 13501-6 : a1
- Halogen free acc. IEC 60754-1/2 : Yes
- Halogen free (according to IEC 60754-2) : Yes
- Fire retardant : Acc. EN 60332-1-2
- Low smoke acc. IEC 61034-2 : Yes
- Low smoke (according to IEC 61034-2) : Yes
- Oil resistant : No
- Oil resistant (according to IEC 60811-404) : No
- Insulation integrity according to IEC 60331 : No
- Cable OD : 5.2 mm
- Installation temperature : 00 - 50
- Operating temperature : -20 - 60
- Category : 6
- NVP : 67 %
- UV resistant : No
- Certified for shipboard application : No
- Suitable as telephone cable : No
- Suitable as computer data cable : Yes
- Suitable as signalling cable : No
- Compatible with Grade2TV according to XP-C 90-483 : No
- Compatible with Grade3TV according to XP-C 90-483 : No